




Multi-Frequency Magnetic Guiding AGV

www.solutions4u-asia.com

GOOGOL TECHNOLOGY

Multi-frequency magnetic guiding Automated Guided Vehicle (AGV) is a comprehensively projected product, which combines vehicle mechanical technology, human-machine interface, mechatronics, SCM, data fusion, real time digital signal processing, trajectory planning, multiple AI object coordination, and wireless communication theories and technology together. It is a typical intelligent system, as well as a model for the research development of multiple AI system and multiple vehicles control.

Its theory and technology can be applied in industrial production, factory automatic logistics system, rescue and other practical fields, thus it has high research and application value. It can accept dispatch commands and follow the instruction accordingly. It picks and places stuff to their corresponding locations and sends the messages to the PC when it's done. Messages of current status of the vehicle, and environment are also sent back to the PC for better control and management.

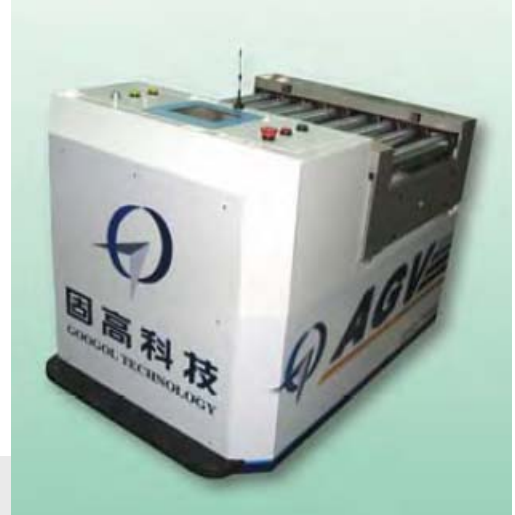


System Characteristics:

- **Vehicle dispatch & pick up** Basic function in the production process. The AGV normally remains in stand-by mode if it doesn't receive the production dispatch mission command. Once receiving the command from the workstation, it will execute the pick up (onto the tray) and transportation process automatically and fulfils the system dispatch function.
- **Transportation** According to the flexible dispatch requirement of the logistic automation system, AGV can fulfill the automatic docking and loading / discharging of material. The automatic transportation function is thus achieved.
- **Obstacle Detection** AGV will stop when there is obstacle on its way. It will resume motion when the obstacle is gone, and the status of the route is sent to the dispatch control system of the workstation.
- **Anti-bumping** A flexible plastic plate and a sensor in the front form the anti-bumping system. Emergency braking of the AGV will be performed if slight bumping is detected in any direction, injury or damage can thus be prevented.
- **Emergency Stop** Emergency stop button can be pressed in case of malfunction to protect against damage.
- **Wireless Communication** Mutual communication between the AGV and the server (communication interface is reserved) is achieved via 802.11 g/b wireless Ethernet. Vehicle system integration and multiple vehicles system group control are fulfilled via wireless network.

Control Software:

1. Composed of guiding algorithm, obstacle-avoiding algorithm, signal processing, wireless communication protocol and other parts.
2. Guiding algorithm: developed according to multi-frequency magnetic guiding mode of AGV to ensure the vehicle travels in the preset trajectory.
3. Signal processing: process the sensor signal of the guiding module, for guiding algorithm.
4. Obstacle avoiding algorithm: React according to the obstacle-avoiding sensor of the vehicle to ensure the safety stop of the vehicle when obstacle is encountered.
5. Wireless communication protocol: The integrated software interface of the vehicle system is wireless Ethernet communication protocol based on 802.11g/b.

Schematic control diagram

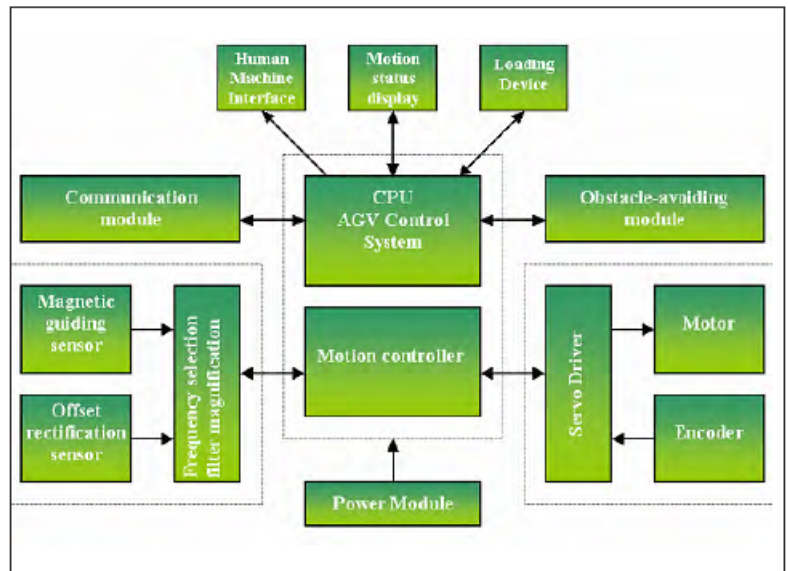

Distributed by:

Solutions4U

Solutions 4U Sdn Bhd (706527-A) 36-1, Plaza Puchong, Jalan Puchong Mesra 1, 58200 Kuala Lumpur, Malaysia Tel: +603-8071 1300 Fax: +603-8071 1400
Solutions 4U Pte Ltd (200713296Z) 259 Onan Road, Singapore 424651 Tel: +65 6468 3325 Fax: +65 6764 5646 www.solutions4u-asia.com enquiry@solutions4u-asia.com



Multi-Frequency Magnetic Guiding AGV

www.solutions4u-asia.com

Technical Specification

Dimension (L x W x H)	1000 X 620 X 830mm
Weight	< 100KG
Travel speed	Vmax=5km/h
Loading capacity	Pmax=50kg
Minimum turning radius	R=1200mm
Number of stops	Settable and changeable dynamically
Precision	Position precision : $S_p \leq \pm 10\text{mm}$ Stop precision : $S_{pt} \leq \pm 15\text{mm}$
Battery	Battery group operating voltage: U=24VDC Capacity : Q=50AH can operate for 3-4 hours continuously
Communication mode	Wireless communication mode
Maximum noise	$\leq 70\text{db}$

Reference Experiments:

- Integration of AGV in logistics system
- Data fusion of multi-sensors
- Theory and application of multi-frequency magnetic guiding method

Ordering Guide

Model	Product Name	Product Configuration
GAGV-M	Multi-frequency magnetic guiding AGV	AGV main body
		AGV control system
		AGV electric control module
		AGV control system software

Distributed by:

Solutions4U

Solutions 4U Sdn Bhd (706527-A) 36-1, Plaza Puchong, Jalan Puchong Mesra 1, 58200 Kuala Lumpur, Malaysia Tel: +603-8071 1300 Fax: +603-8071 1400
Solutions 4U Pte Ltd (200713296Z) 259 Onan Road, Singapore 424651 Tel: +65 6468 3325 Fax: +65 6764 5646 www.solutions4u-asia.com enquiry@solutions4u-asia.com